



Experience Innovation

## 18" Vacuum-Assisted Solids Handling Pump

### 18JSVK

With its heavy-duty cast-iron construction and fast priming capabilities, this solids handling jet pump leads the industry in construction, industrial and municipal applications. The Thompson 18JSVK is designed for high flows to 10,500 gpm and heads to 130 feet making it perfect for sewage bypass pumping or general construction dewatering.



Photo shown may not be exact model.




Consult factory for other options

Pump End Materials	
<b>Pump Casing</b>	Heavy-duty class 30 ductile iron.
<b>Impeller</b>	Dynamically balanced, non-clogging, enclosed, class 30 cast iron with rear-equalizing vanes to reduce axial loading and prolong seal and bearing life; Diameter 17.5".
<b>Mechanical Seal</b>	3" dry-running, oil or grease lubricated with Tungsten Carbide rotating and Silicon Carbide stationary seal faces. Single inside mounted, non-pusher type with self-adjusting elastomeric bellows. Other components are 304 stainless steel and Viton.
<b>Head</b>	Rugged, back pull out design, heavy-duty class 30 cast iron with tapered bore design.
<b>Bearings &amp; Frame</b>	Heavy-duty grease lubricated to carry both axial and radial loads. Frame, heavy-duty class 30 cast iron.
<b>Shaft</b>	SAE 1144 steel fitted with a renewable 416 stainless steel shaft sleeve.

Technical Specifications			
Suction Size	18 in (45.72cm)	Approximate Dry Weight	14,000 lbs (6,349 kg)
Discharge Size	18 in (45.72 cm)	Best Efficiency	75%
Maximum Solids Handling	3 in (7.62 cm)	Maximum Operating Speed	2,000 rpm
Maximum Operating Temperature	200° F (93.33° C)	Maximum Operating Pressure	56.3 psi (388.02 kPa)

Fuel Tank Options*		Volvo
Modular (M)	220 Gal	26 Hours

\*Contact factory for fuel tank sizes not listed above.

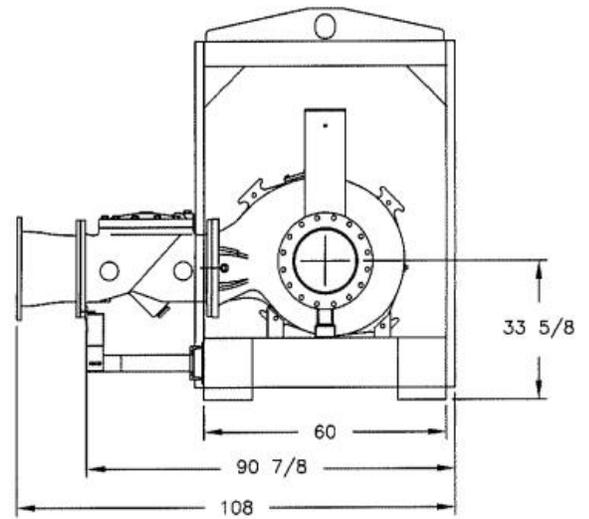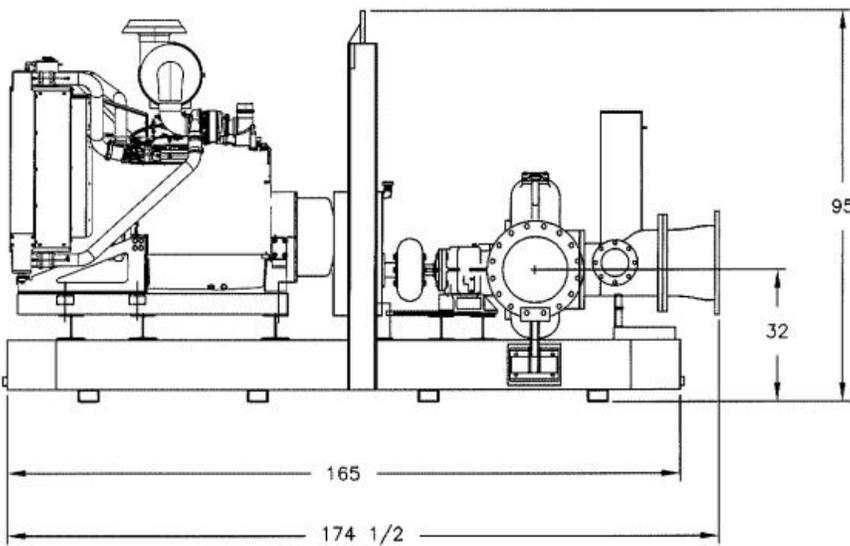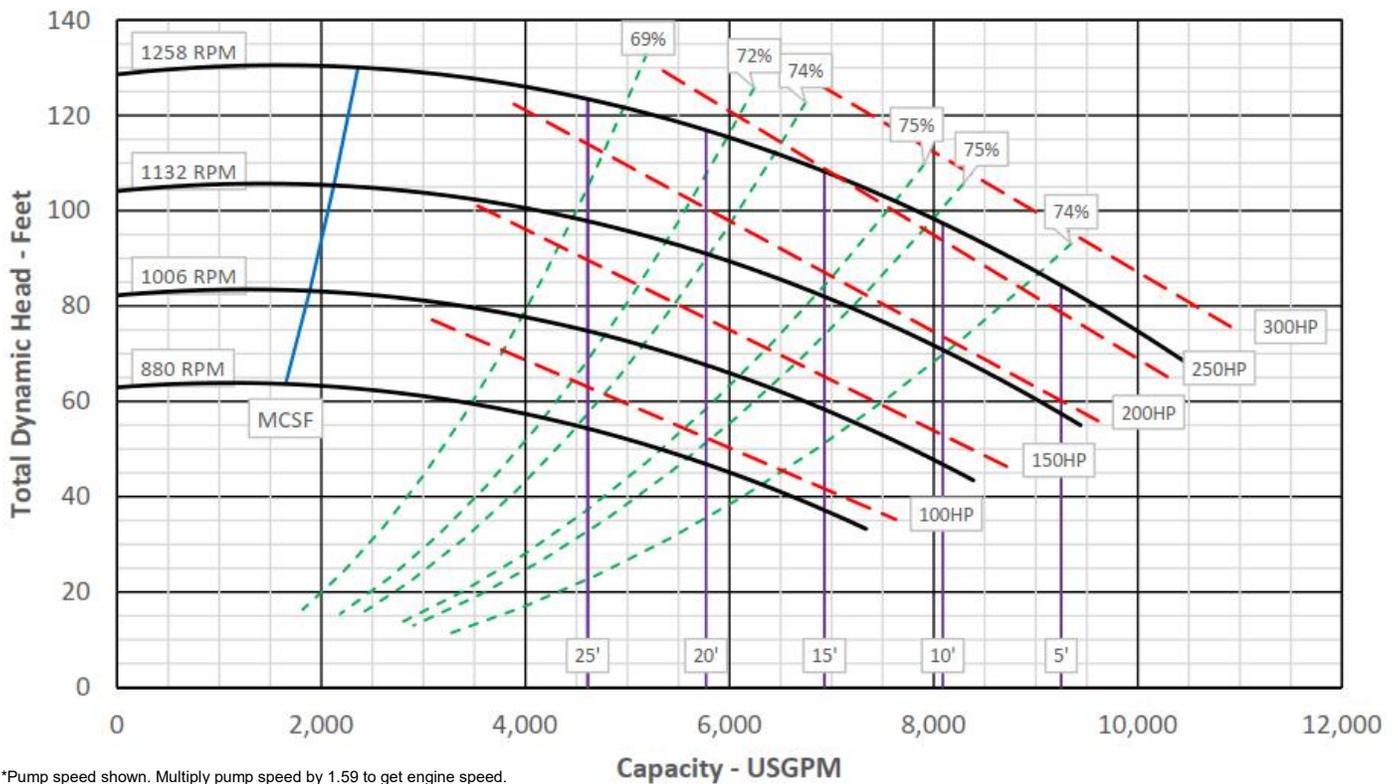

### Volvo 873VE— 320 hp @ 1,800 rpm

Typical Operating Speed	2,000 rpm	Engine Speed	Fuel Economy	Run Time*
Maximum Head	130 ft (39.62 m)	2,000 rpm	0.342 lb/hp-hr	16 hrs
Maximum Flow Capacity	10,500 gpm (2,385 m <sup>3</sup> /hr)	1,800 rpm	0.332 lb/hp-hr	20 hrs
Maximum Fuel Consumption	13.06 gph (51.67 L/hr)	1,600 rpm	0.328 lb-hp-hr	26 hrs

\*Engine run times calculated based on a 220 gallon fuel tank.

Specifications and illustrations are subject to revision without notice and without incurring any obligation for previous or subsequent equipment sold. Thompson Pump (ISO 9001:2015) makes no representation regarding the completeness or accuracy of this information and is not liable for any direct or indirect damages arising from or relating to this information or its use. Capacity & Head are shown for comparative purposes. Consult Thompson factory for exact capabilities.